Intellian[®] i6W

World's First & Only Global Satellite TV Service Reception 60cm Ku-band Marine Satellite Antenna



Intellian i6W is the world's first and only 60cm marine satellite antenna system that is capable of receiving thousands of global satellite TV services as well as the latest advanced DVB-S2 programming without ever forcing boaters to change any antenna hardware again.

Integrated with the 2nd generation WorldView™ LNB module, i6W offers a rock-solid and the highest stability of ±10 kHz for TV receptions and allows boaters seamlessly to tune in any channels on any satellites and automatically switch between circular polarized programming in North, Central and South Americas, and linear polarized programming in Europe, Middle East, and the Asia Pacific region.

The i6W is able to withstand the most severe shock and vibration generated by the harsh marine environment. With a simplified yet sophisticated mechanical design and excellent satellite tracking capability, the i6W is recognized as the Real Definition for Satellite TV System at Sea.



Global Satellite Services Compatibility

Intellian i6W provides the ultimate convenience to connect you up to thousands of Free TV, Pay TV, Standard Definition, and High Definition programming all over the world with one LNB module which incorporates multi (8) LO frequencies.

Hands-Free WorldView™ LNB Module

The 2nd generation, patent-pending WorldView LNB module is the latest innovation from Intellian. Unlike other TVRO system LNB's with $\pm 1,000$ kHz stability, the Intellian WorldView LNB module is built on the highest stability of ± 10 kHz which has 100 times more accuracy and greater signal sensitivity. In addition, this LNB module receives multi-band and multi-polarization satellite TV services around the globe. Therefore, boaters don't need to manually change the LNB inside the antenna dome each time the vessel crosses into a different satellite service region.

DVB-S2 Digital TV Reception

Some of the HD TV services have moved onto DVB-S2 and will be more in the future. Thanks to Intellian's groundbreaking DVB-S2 digital TV technology, now boaters are able to enjoy their favorite DTH (Direct To Home) entertainment at sea, just like home.

Global Satellite Library

The i6W includes the pre-programmed global satellite library which allows boaters to select the desired satellite while travelling from region to region. Once the satellite is selected the WorldView LNB module will automatically switch to the corresponding local frequency to receive the signal.



Intellian[®] i6W

60cm Ku-band 2-axis Marine Satellite Antenna Systems

Technical Specification

•		
Part	Specifications	
B2-613W2	Intellian i6W Satellite TV Antenna System	
Physical		
Radome (D x H)	70 x 72 cm / 27.5" x 28.3"	
Antenna Dish Diameter	60.0 cm / 23.6"	
Weight	21 kg / 46.3 lbs	
Environmental		
Operating Temp. Range	-15°C to +55°C / +5°F to +131°F	
Storage Temp. Range	-25°C to +70°C / -13°F to +158°F	
Water Ingress	IPX6	
Approvals	CE / FCC	
Warranty	2 year parts and 1 year labor	
Performance		
Reception Frequency	Ku-Band (10.7 ~ 12.75 GHz)	
Minimum EIRP	47 dBW	
Azimuth Range	680°	
Elevation Range	+5° to +90°	
Ship's Motion	Roll ±25°, Pitch ±15°	
Roll & Pitch Response Rate	45°/sec	
Turn Rate	45°/sec	
RF Output	Quad output	


Antenna Control Unit		
Dimensions (W x D x H)	17.8 x 21.7 x 5.4 cm / 7" x 8.5" x 2.1"	
Weight	1.2 kg / 2.6 lbs	
Display	2 line 20 character VFD module	
Power Input	Input: 9.0~30.0 V DC (Typ. 30 W, max 50 W)	
GPS Interface	Built-in (NMEA 0183 GPS)	

LND LO Fraguencias		
LNB LO Frequencies		
Local Oscillator Frequency	Polarization	Area
11.250 GHz	Dual Circular	North America, Russia
10.500 GHz	Dual Circular	Latin America
10.750 GHz	Single Circular	Korea
10.750 GHz	Dual Circular	China
10.678 GHz	Single Circular	Japan
11.300 GHz	Dual Linear	South East Asia
10.700 GHz	Dual Linear	Australia
Universal Low: 9.75 GHz High: 10.6 GHz	Quad Linear	Europe, Middle East, Africa, some Asia countries

Note • LNB stability: ±10 kHz (Except at Universal 9.75 GHz)

- LNB LO frequencies can be extended
- LNB LO frequencies are automatically changed according to target satellites
- Polarization can be switched between circular and linear

System Diagram

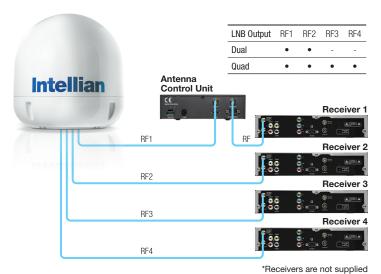

Key Features

Global satellite TV services compatibility	
Built-in WorldView LNB module	
DVB-S2 decode capability	
Built-in GPS and auto LNB pol control system	
Built-in pre-programmed global satellite library	

Coverage



US Headquarters Americas Region

Intellian Technologies USA, Inc. 9004 Research Drive Irvine, CA 92618, USA

+1-949-727-4498 Toll Free +1-888-201-9223 +1-949-271-4183 Fax Email info@intelliantech.com Headquarters EMEA & APAC Region Intellian Technologies, Inc. 2F Dongik Bldg., 98 Nonhyun-dong, Kangnam-gu, Seoul 135-010, Korea

+82-2-511-2244 +82-2-511-2235 info@intelliantech.com

ISO 9001 Certified

For more info, visit intelliantech.com